

E-mail operation

Sending

- > To resume the device from energy saver, press any key on the operation panel.
- > Place the originals on the platen or in the document processor.
- > Press **SEND**.



1 Enter the destination address.

From the address book:

Press **ADDRESS BOOK**. Press the checkbox to select the desired destination from the list. Press **SEARCH**, to find the destination. Enter the name you search for. Confirm with **OK**.

You can also press **MENU** to perform a more detailed search.

You may choose multiple destinations.

Enter an e-mail address:





Press **E-MAIL**. Enter the e-mail address on the touch screen. After that press **OK**.

If you want to send the e-mail to several destinations press **ADD DEST..**

Enter a fax number:

Press **FAX** on the touch screen. Press **ADD DEST..** Enter the fax number in the destination field.

2 To start transmission press **START**.

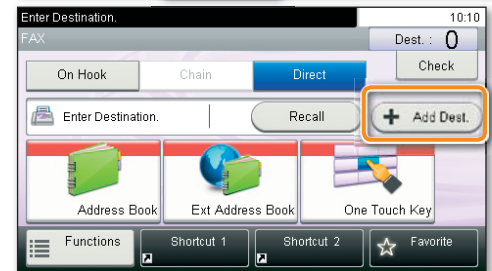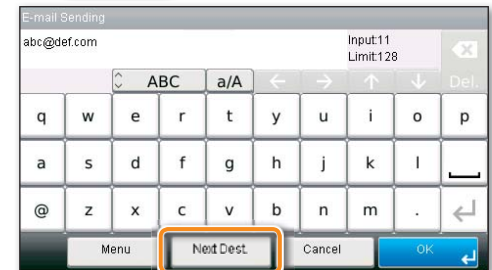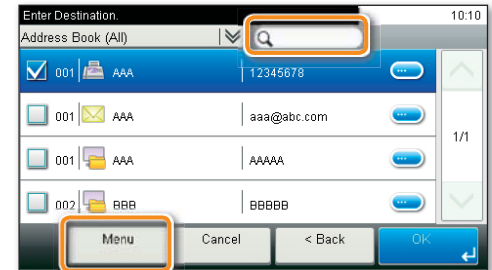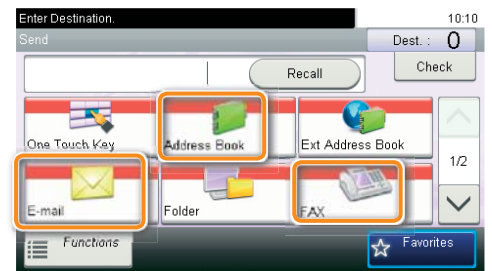

Scan settings



- > Press **SEND**.



1 Press **FUNCTIONS**.

2 Choose the items to be changed by opening the related submenu.

3 Confirm with **CLOSE**.

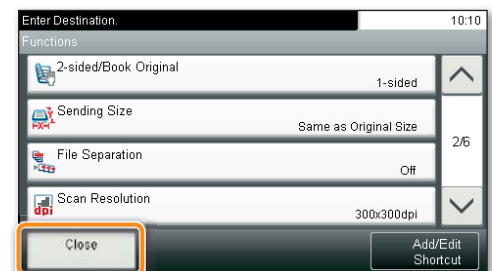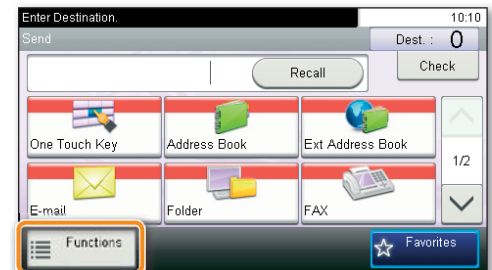


Fax operation

Cancelling sending job

- > If the documents are still fed, press **STOP**.





- 1 Press **STATUS/JOB CANCEL**.
- 2 Press **SEND JOB STATUS**.
- 3 Choose the job to be cancelled and press **CANCEL**.
- 4 Confirm with **YES**.
Communication is cancelled.

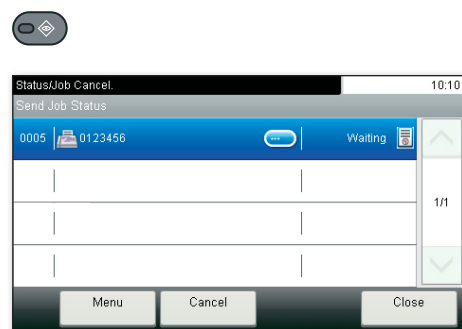

Check transmission result

- 1 Press **STATUS/JOB CANCEL**.
- 2 Press **SEND JOB LOG**.

- 3 The result is displayed.
- 4 Press to display more details of the selected transmission.

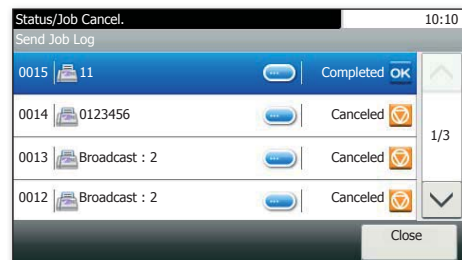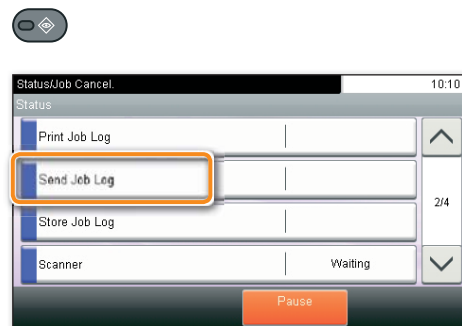



Using Favorites

- > Press **FAVORITES**.



- 1 Select a favorite.

- 2 Make the desired settings.
- 3 Confirm the settings and start the job.

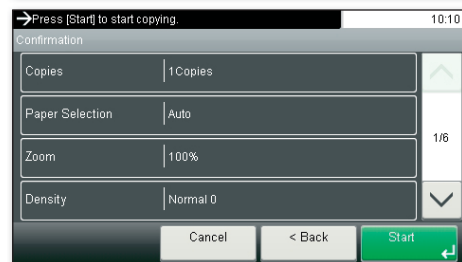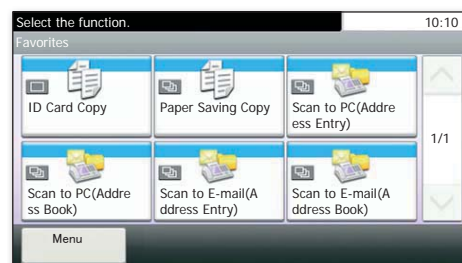


Print operation

Private printing

Note: To activate the private printing from the PC, select the **JOB** tab in the printer driver and click **PRIVATE PRINT**. The section **JOBNAME** allows you to type in your name directly.


- > From the application select **FILE, PRINT**.
- > Select **PROPERTIES**.
- > In the printer driver click on **JOB**.

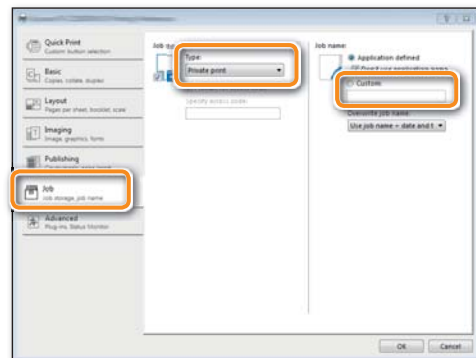

- > Press **JOB BOX**.




- 1 Press **PRIVATE PRINT**.

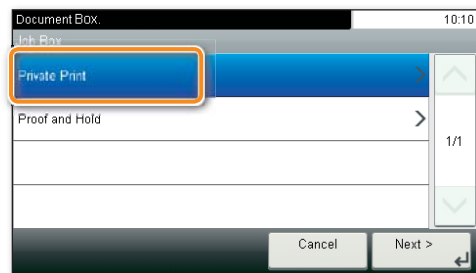

- 2 Select the creator of the private print job.
- 3 Select the document to be printed from the list. If the document is password protected, type in the PIN with the **TEN-KEY** pad.
- 4 Press **PRINT** to start printing.

Note: By pressing jobs can be cancelled.

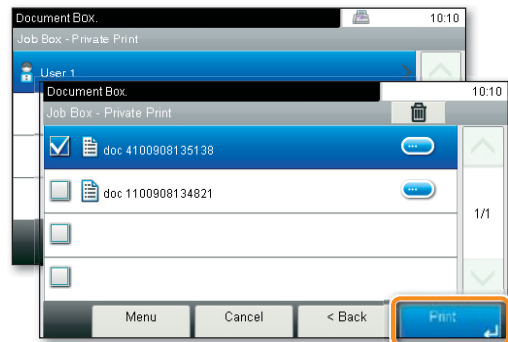


Cancel print job

- 1 Press **STATUS/JOB CANCEL**.
- 2 Press **PRINT JOB STATUS**.
- 3 Select the job you wish to cancel and press **CANCEL**.



- 4 Confirm with **YES**. Job is cancelled.

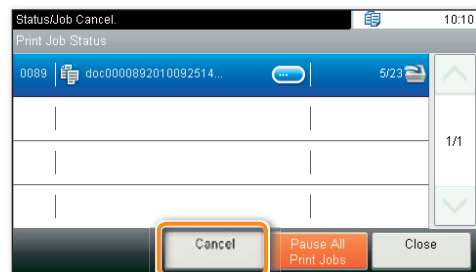


Copy operation

Prepare copy

- > To resume the device from energy saver, press any key on the operation panel.
- > Place the originals on the platen or in the document processor.
- > Press **COPY**.




- 1 Choose the copy mode.
- 2 Enter the number of copies with the **TEN-KEY** pad.

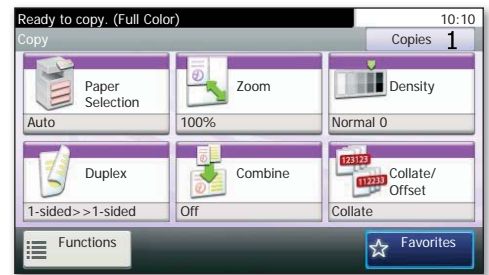

Optional Settings


Duplex

Press **DUPLEX** on the touch screen and select the desired function.

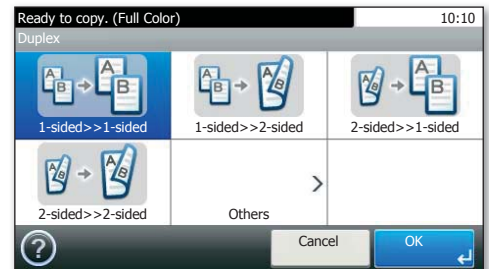


Changing paper source

Press **PAPER SELECTION**. Choose the desired paper format. When using special sizes select the MP tray. Confirm your selection with **OK**.

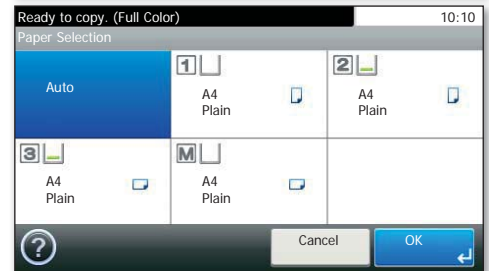

Reducing/Enlarging (Zoom)

Press **ZOOM** on the touch screen. Select the original format and the target format or choose the zoom factor.

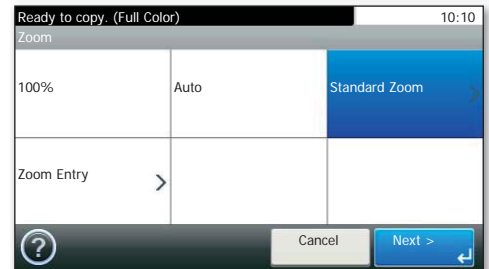

Paper output

Press **FUNCTIONS** and then **PAPER OUTPUT**. Select a tray and confirm with **OK**.

All of above optional settings have to be confirmed with **OK**.

You may choose additional settings by pressing **FUNCTIONS** from the main menu.

- 1 Press **START** and the copy starts.

